

SUPPLEMENTARY MATERIAL TO  
**The influence of nanoclays on the mechanical and thermal  
properties of rigid PIR and PUR foams**

RUSLAN R. VLASOV<sup>1\*</sup>, DARIA I. RYABOVA<sup>1</sup>, SAKINA Z. ZEYNALOVA<sup>2</sup>,  
DMITRY V. SOKOLOV<sup>1</sup> and SERGEI A. RYABOV<sup>1</sup>

<sup>1</sup>Lobachevsky State University – Faculty of Chemistry, Department of Macromolecular  
Compounds and Colloidal Chemistry, Gagarina av. 23, 603098 Nizhny Novgorod, Russia  
and <sup>2</sup>Tre Tau Engineering srl, Pietro Colletta 85, 10153 Torino, Italy

*J. Serb. Chem. Soc.* 88 (4) (2023) 409–421

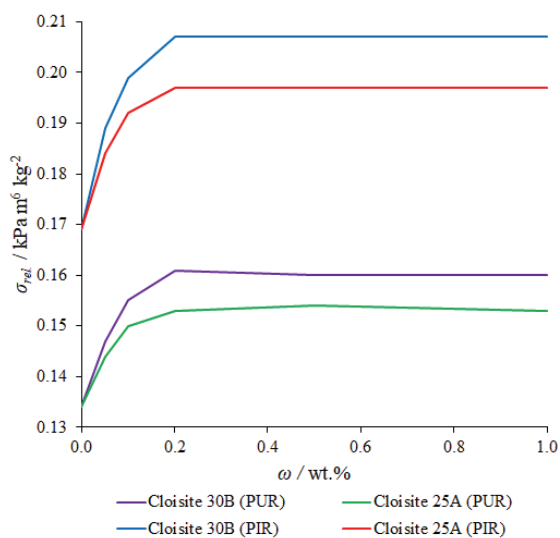


Fig. S-1. Dependence of relative compressive strength on filler content.

\* Corresponding author. E-mail: vlasovruslan.hs@yandex.ru

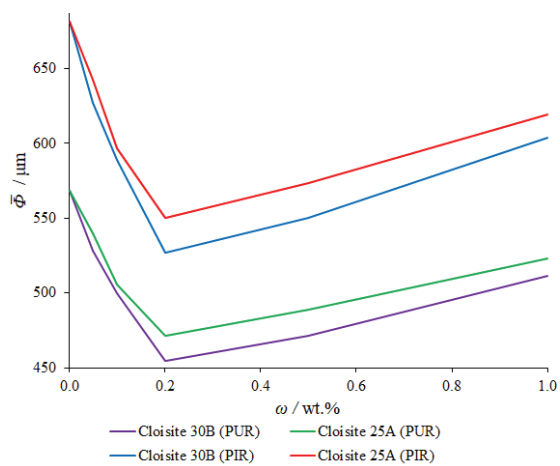


Fig. S-2. Dependence of the change in the average cell size of the composite foam on the content of the filler.

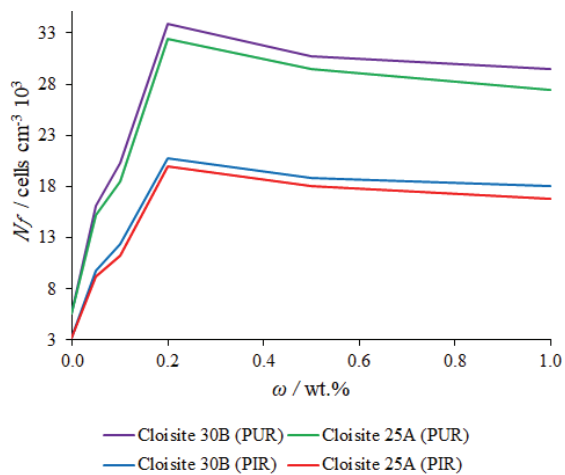


Fig. S-3. Dependence of cell density change in composite foams on filler content.

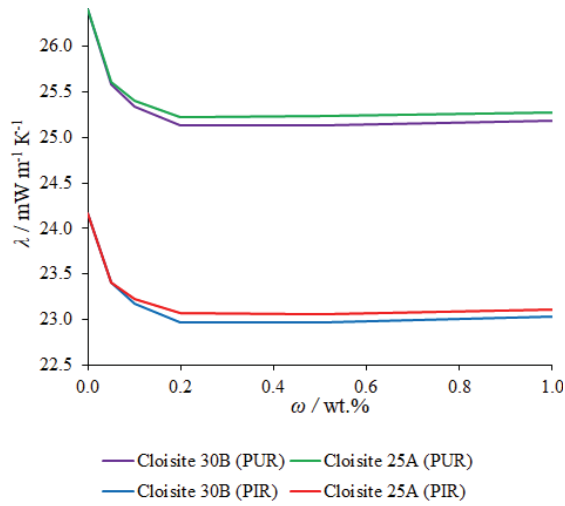


Fig. S-4. The dependence of thermal conductivity of composite foams from filler content.

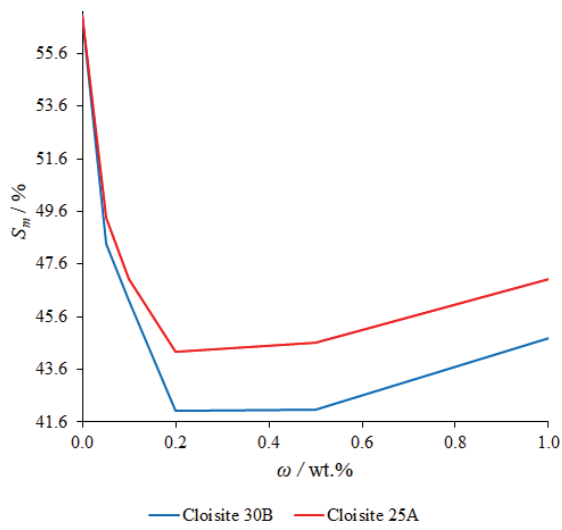


Fig. S-5. The dependence of damage by mass of composite foams from filler content.


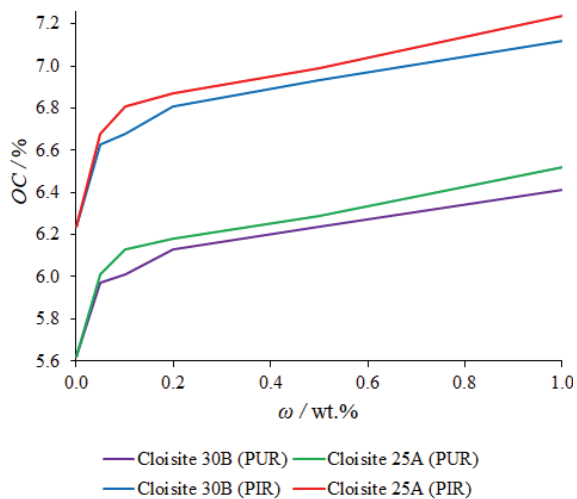


Fig. S-6. The dependence of the content of open cells in composite foams on the content of the filler.

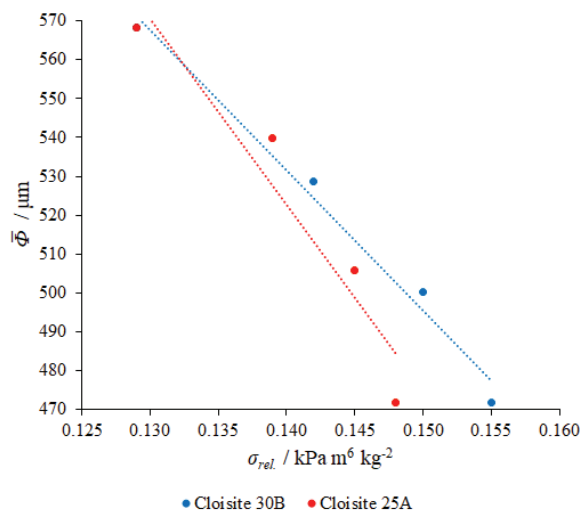

Fig, S-7. Dependence of relative compressive strength from the average cell size of composite foams.