



SUPPLEMENTARY MATERIAL TO
**Temporal and spatial distribution of physicochemical
parameters and water quality indices in an oligotrophic
dam lake: A case of Maksutlu Dam Lake, Sivas, Türkiye**

MENEKŞE TAŞ DİVRİK^{1*} and RUTKAY ATUN²

¹*Sivas Cumhuriyet University, Şarkışla Aşık Veysel Vocational School, Şarkışla, 58400, Sivas, Türkiye* and ²*Sivas Cumhuriyet University, Faculty of Engineering, Department of Geomatics Engineering, 58140, Sivas, Türkiye*

J. Serb. Chem. Soc. 91 (0) (2026) 000–000


Maksutlu Dam Lake was constructed for irrigation purposes on the Maksutlu Stream, upstream of Maksutlu village in the Şarkışla district of Sivas Province. The dam, which is of the clay-core homogeneous fill type, serves irrigation needs. The dam lake has a volume of 2,950,000 m³ and irrigates an area of 400 hectares. The dam's height from the riverbed is 19 m. At the normal water level, the lake's volume is 2.95 hm³ and its surface area is 0.42 km².¹ Three stations that best represent the characteristics of the dam lake were selected for this study. Information about these stations and their characteristics is presented in Table S-I.

TABLE S-I. Coordinates and Characteristics of the Stations

Stations	Coordinates	Characteristics of Stations
1	39° 22' 42" N 36° 29' 39" E	It is just behind the dam embankment.
2	39° 22' 48" N 36° 30' 04" E	This station is located opposite the dam embankment, very close to agricultural areas.
3	39° 22' 50" N 36° 29' 54" E	It was selected from a part of the dam lake close to the picnic areas.

The map of the study area and sampling locations is given in Fig. S-1.

*Corresponding author. E-mail: menekse.tas@cumhuriyet.edu.tr

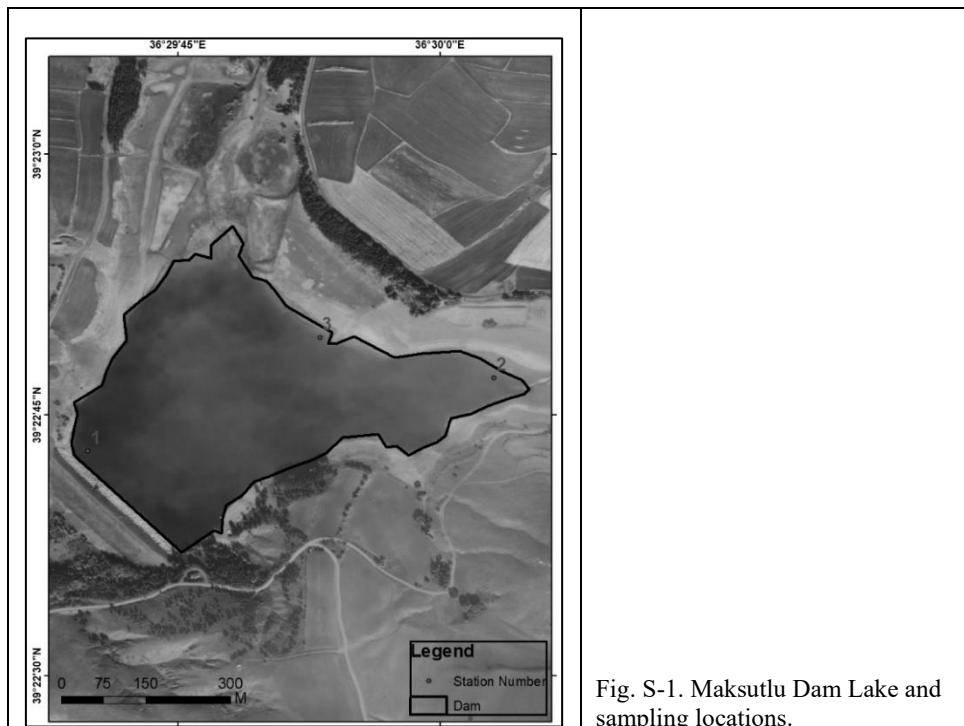

REFERENCES

1. *Sivas Province Environmental Status Report*, Republic of Turkey Sivas Governorship Provincial Directorate of Environment, Urbanization and Climate Change, Sivas, 2023.